


The model No. and meaning



DZ519-M(GV3-M)

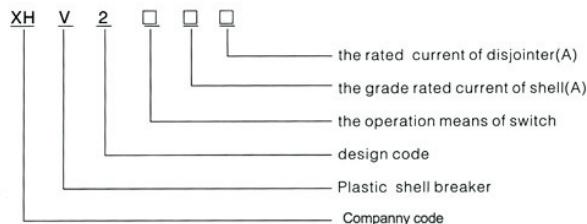

DZ519-ME(GV3-M)

Product Features

DZ519 breaker(GV3Motorcircuitbreaker)is applied to control theoverload, phade-broken,short-circuir protection and non-frequent start of three-pha squirrel-cage asynchronous electromotor in the circui withmax AV 690 and 1A-80Acurrent, and is used as distribrion line protrection and nonfre quent overload conversion, and is also usedas the isolator.

Specification

DZ519-M	(GV3-M)	(GV3-ME)
DZ519-M10	6-10A	6-10A
DZ519-M16	10-16A	10-16A
DZ519-M20	14-20A	14-20A
DZ519-M15	16-25A	16-25A
DZ519-M400	25-40A	25-40A
DZ519-M63	40-63A	40-63A
DZ519-M80	56-80A	56-80A

Type	The adjusting range commuting current for coppnents A.	Kw AC-3,50HZ/60HZ The standard power of three-phase electromotor KW.ac-350HZ/60HZ
	AMPS	KW
DZ519-M40	25-40	18.5
DZ519-M63	40-63	30
DZ519-M80	56-80	40

Dimension drawing

