

1.RCT Series

Primary current:30A-3000A

Secondary current:5A, 1A

Standard approval:IEC44-1

Maximum voltage:0.66KV



Frequency:50-60KV

Rated load:15VA

Class:1.0

Short-time thermal current:1th=60×1h

Rated security coefficient:FS<5

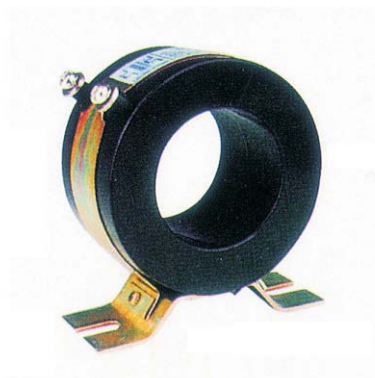


2.Specification

Model	Primary/secondary
RCT-25	15/5 20/5 30/5 40/5 50/5 60/5 75/5 100/5A
RCT-35	30/5 50/5 60/5 80/5 100/5 120/5 150/5 250/5 300/5A
RCT-60	300/5 400/5 500/5 600/5 1000/5 1200/5A
RCT-90	1000/5 1200/5 1500/5 1600/5 2000/5A
RCT-110	2000/5 2500/5 3000/5 4000/5 5000/5A

Model	RCT-25	RCT-35	RCT-60	RCT-90	RCT-110
A	93	93	93	93	102
B	78	78	78	78	86
V	25	32	60	90	111
D	78	78	104	136	157
E	2	2	2	2	2
F	55	55	41	41	52
G	9	9	9	9	9

3.RCT Series

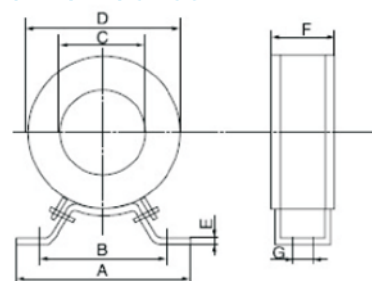

Dimension of case unit:mm

