


B Wintersweet Shaped Copper Jointing Clamp

1. Application

It is suitable for transition connection of electronic apparatus with wire and cable in indoor distribution equipment, made of brass by die cast and coated nickle.




2. Specifications

Type	L	A	B	d
B16-25	37	10	21	7.5
B25-35	48	13	22	11
B50-70	60	17	31	11
B120-150	70	23	35	15
B210-250	90	30	46	17

GT Copper Cable Connector

1. Application

GT series copper cable connectors are applicable for the connection of the circular wire with power supply cable in distribution equipment. They are made of tin coated 99.9% pure copper tube.

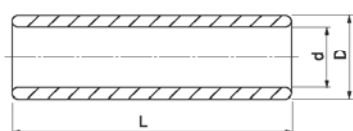

2. Specifications

Type	D (mm)	d (mm)	L (mm)
GT-1.5	3.7	1.8	20
GT-2.5	4	2.5	20
GT-4	4.8	3.1	20
GT-5.5	5.5	3.8	25
GT-10	6.8	4.8	30
GT-16	7.5	5.5	35
GT-25	9	7	40
GT-35	10.5	8.2	45
GT-50	12.5	9.8	50
GT-70	14.5	11.5	55
GT-95	17.5	13.5	60
GT-120	19.5	15	65
GT-150	21	16.5	70
GT-85	23.5	18.5	75
GT-240	26.5	21	80
GT-300	30	24	85
GT-400	34	27	90
GT-500	38	30	100
GT-630	45	35	110
GT-800	50	39	150
GT-1000	56	44	170