


Outline :

SAK/JXB series combined terminal blocks mainly use germany woodmeler's connection technology, and be designed and made at home. Technology targets conforms to the standard of IEC60947-7-1,IEC60947-7-1,GB14048.1. however,JXB is only for mounting on ,increase the high current terminal series

Feature:

- 1.reasonable installing design,strong versatility, SAK tpe can be mounted on the guide of G and TH type
- 2.small volume,full specifcation,series JXB's big current terminal use reinforced accessories to install steel pressing-wire frame and wire diversion board technology in order to guarantee the the contact reliable .
- 3.the stand uses creamed-yellow and grey color, the connecting-ground pedestal uses yellow and green color with more modern sense.

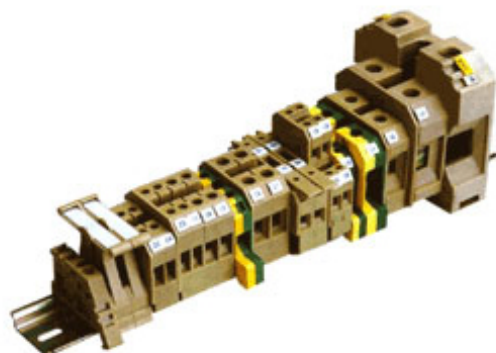

mark stand


SAK-B JXB-B

rated voltage / rated current
/ rated section

end cover:thick1.5mm

Center connection piece:10 position.can be divided into
2, 3 or 4 position

universal end fixed piece

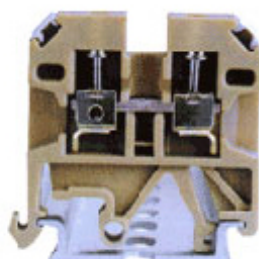

universal type


SAK 2.5EN JXB2.5/35

0.5-2.5mm²
current:24A voltage:800V

AP2.5

2.5Q 2-10

EW35



universal ytpc


SAK 4EN JXB 4/35

0.2-4mm²
current:32A voltage:800V

AP4


4ENQ 2-10

EW35



universal type

SAK 6EN JXB6/35







universal type

SAK 10EN JXB10/35



universal type

SAK 16EN JXB16/35

0.2-6mm ² current:41A voltage:800V	0.2-10mm ² current:57A voltage:800V	0.5-16mm ² current:76A voltage:800V
AP6	AP10	AP16
6ENQ2-10	10ENQ2-10	16ENQ2-10
EW35	EW35	EW35
		
universal type	universal type	double level type
SAK 35EN JXB2.35	SAK 70EN JXB70/35	DK 4Q/35 JXB-4/35S1
10-35mm ² current:125A voltage:800V	25-70mm ² current:192A voltage:800V	0.2-4mm ² current:32A voltage:50V
AP35	AP70/35	AP-DK4
35Q2-10	2.5Q2-10	DK4Q2-10
EW35	EW35	EW35
		
double level type	fuse type	test type
DK4QV/35 JXB-4/35SZ1	SAK RD LTU4-RD(JXB RD)	SAK WL 6/1S JXB-WL6/1
0.2-4mm ² current:32A voltage:500V	0.2-4mm ² current:6.3A voltage:500V	0.2-4mm ² current:41A voltage:400V
AP-DK4	AP1.5	WAP-WTL4
AP-DK4 2-10		WTL2-10
EW35	EW35	EW35

universal terminal blocks



EK2.5/35 0.2-2.5mm²



EK4/35 0.2-4mm²




EK6/35 0.2-6mm²



EK10/35 0.5-10mm²



EK16/35 0.5-16mm²



GD35