

Product Introduction :

With the continuing development of the electric industry, the composite Insulator which adopted synthesis insulation materials are popularized and applied rapidly by its excellent mechanical and electrical function, it becomes the new generation products replace the traditional porcelain outside insulation; high strength Expoxypoles provide inside insulation for products and sustain machine load. These products use new technology, which press connect of mold, mandril and metal terminal it is improved the improved improved the products' reliable, the characters as follows:

Superior electrical function and strength soiling. Excellent hydrophobicity of the silicon rubber shed improve the level of the soiling resistance, the wet withstand voltage and pollution resistance voltage are 2-2.5 times than equal porcelain insulator. so it reduce the soiling resistance accident's happening, guarantee the economic and reliable of the electrical met's operating.


The expoxy poles are sustained inside of the composite Insulators have great tensile strength, are 2-3 times than common steel, and 8-10 times than high strength porcelain, so as to improved the mechanical capability of the products tensile.

The connection between terminal and mandril adopted advanced technology of press and connector type. for guarantee the reliable mechanical strength of the products.

Silicon rubber material with superior with superior properties of high and low temperature resistance, climate resistance, heat and aging resistance, electric drode resistance. Composed solid structure with expoxy poles, ensured inside insulation against moist. And also needn't clean and safeguard during the raining.

Composite Insulators have small volume, light weight (for 1/4-1/8 as same voltage level porcelain insulators), use standardize structure of "ball and hole" connection, convenient to shipment to shipment and installation. Composite Insulators have excellent impulse resistance, shock resistance, and explode resistance.

Definition of model :

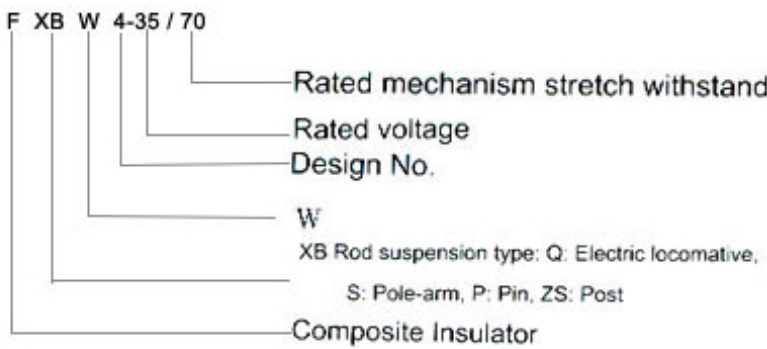

Main Dimensions and Standard Particulars :

Type		53-1	53-2	53-3	53-4	53-5
Cat.No		006008	006009	006010	006011	001012
Fig No		2	1	2	2	3
Main Dimensions(mm)	H	54	76	81	76	105
	h	27	38	40.5	38	52.5
	D	57	79	76	105	102
	d	45	45	45	73	73
	d1	18	18	18	18	18
	d2	22	24	24	24	24
	R	11	18	11	16	11

Mechanical Failing load (Kg)				907	1360	1814	2041	2722
Flashover (min)	Power Frequency	Dry(Kv)		20	25	25	25	35
		Wet(Kv)	Upright	8	12	12	12	18
			level	10	15	15	15	25
Wight (kg)				0.22	0.55	0.60	0.15	1.20

Outline Drawing:

