

Split core current transformers MES series:


The MES series of current transformer have beautiful outline and Convenient for mounting in many ways. The most current transform need the special mounting and the MES series used the mounting of DIN typing With a lot of times. The protective cover for the terminal block used the switching device with Safety and quick.

MES guide rail type CT :


Primary current: 5A-3000A
 Secondary current: 5A, 1A
 Standard approval: VDE0414, BS7626, IEC44-1
 Maximum voltage: 0.72/3KV
 Frequency: 50-60Hz
 Rated load: 2.5VA, 5VA, 10VA, 15VA
 Class: 0.5, 1.0
 Short-time thermal current: $I_{th}=60 \times I_h$
 Rated security coefficient: FS<5

Dimension of case [mm]:


Model	A	B	C	D	E	F	G
MES-62/30	81	47	30	35	71	31	62
MES-62/40	81	47	30	35	71	41	62
MES-30	88	52	30	41	77	31	80
MES-40	88	52	30	41	77	41	80
MES-60	117	57	50	184	77	61	101
MES-100	115	53	86	38	74	101	145

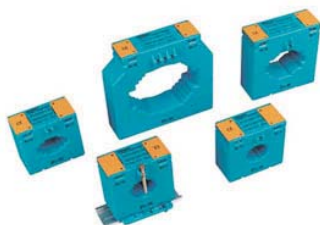

Outline Drawing:

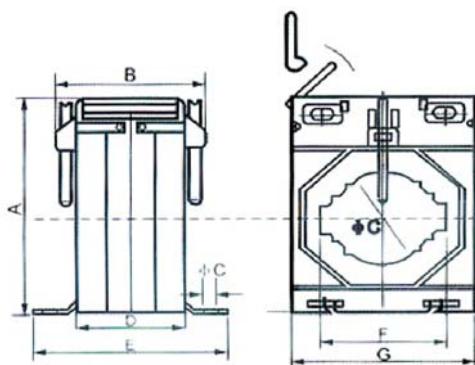

Technical data & Sepecification



Type	Rated current (A)	Rated power (VA)	
		Class:0.5	Class:1
MES-62/30	30/5	-	1
	40/5	-	1
	50/5	-	1
	60/5	-	1.5
	75/5	-	1.5
	100/5	1.5	2.5
	150/5	2	3
	200/5	2.5	5
MES-62/40	60/5	-	1
	75/5	-	1
	100/5	1	2
	150/5	1.5	2.5
	200/5	2.5	5
	250/5	3	5
MES-30	300/5	5	7.5
	30/5	-	1
	50/5	-	1
	60/5	-	1.5
	75/5	-	1.5
	100/5	1.5	2.5
	150/5	2.5	5
MES-40	200/5	5	7.5
	100/5	1.5	2.5
	150/5	2.5	5
	200/5	5	5
	250/5	5	5
	300/5	10	15
	400/5	10	15
MES-60	500/5	10	15
	600/5	15	20
	800/5	15	20
	1000/5	15	20
MES-100	1200/5	15	20
	1000/5	15	30
	1200/5	15	30
	1500/5	15	30
	1600/5	15	30
	2000/5	15	30
	2500/5	15	30
	3000/5	15	30